



RETRACT ROOFS CONFIGURATION OPTIONS

RETRACT ROOFS CONFIGURATION OPTIONS AT A GLANCE

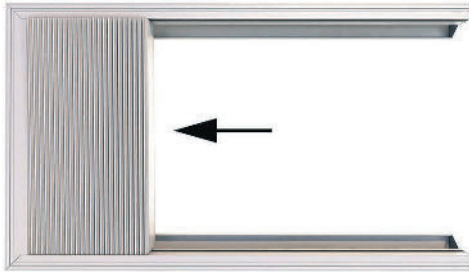


OPTION 1
THREE SIDED FRAME -
BLADES STACK TO REAR

- No front beam, blades stack to rear
- Can be even or uneven number of blades

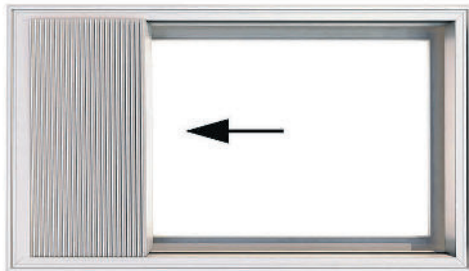


OPTION 2
FOUR SIDED FRAME -
BLADES STACK TO ONE END

- Blades can stack to one end
- Can be even or uneven number of blades

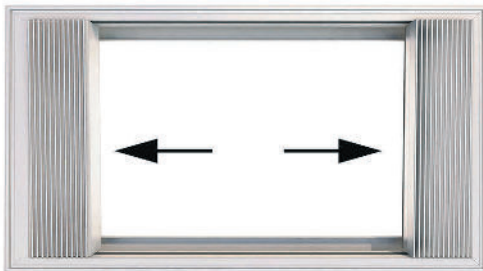

OPTION 3
FOUR SIDED FRAME -
BLADES STACK AT EACH END

- Blades split stack from centre to each end
- Must be even number of blades

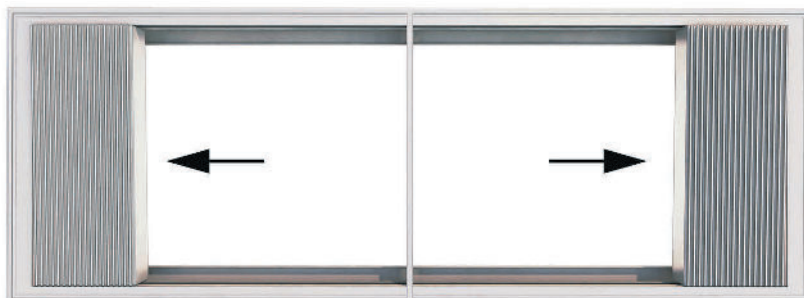

OPTION 4
FOUR SIDED FRAME -
DOUBLE RETRACT
WITH MID-BEAM

- Two Retracts meeting at mid-beam
- No mid-beam gutter required, blades close onto mid-beam flashing
- Blades stack from centre to each end
- Can be even or uneven number of blades
- Maximum length: up to 13,734mm